Spraying Systems Co.®
Experts in Spray Technology

TANKJET® TANK CLEANING PRODUCTS

QUICK REFERENCE GUIDE

TANKJET® TANK CLEANING PRODUCTS

Nozzle	Max. Tank Dia. ft (m)	Operating Principle	Flow Rate gpm (lpm)	Pressure psi (bar)	Spray Coverage	Min. Tank Opening in (mm)	Max. Temp. °F (°C)	Recommended Strainer Mesh (micron)
TankJet 360	**100 (30)**	Fluid-driven turbine	30 to 300 (114 to 1136)	40 to 350 (2.8 to 24)	360°	6.25 (159) for 2 nozzle; 10.25 (260) for 3 nozzle	250 (121)	20 (841)
TankJet AA290	**80 (24.4)**	Motor-driven	22 to 200 (85 to 757)	50 to 250 (3.5 to 17.0)	360°	7.25 (184) for 2 nozzle; 8.25 (210) for 4 nozzle	200 (93)	100 (149)
TankJet 180		Fluid-driven turbine	30 to 300 (114 to 1136)	40 to 350 (2.8 to 24)	180°	12.25 (311)	250 (121)	20 (841)
TankJet 80	**50 (15.2)**	Fluid-driven turbine	50 to 125 (189 to 473)	60 to 150 (4.1 to 10.3)	360°	6.5 (165) for 2 nozzle; 12.5 (318) for 3 nozzle	250 (121)	20 (841)
TankJet 78 & 78D	**45 (13.7)**	Fluid-driven turbine	65 to 165 (276 to 679)	25 to 100 (1.7 to 7.0)	360°	TJ78: 5.75 (146); TJ78D: 7.63 (194)	180 (82)	50 (297)
TankJet 65 & 65HT	**40 (12.2)**	Fluid-driven turbine	30 to 150 (114 to 568)	50 to 150 (3.4 to 10.3)	360°	7.5 (190)	TJ65: 250 (121); TJ65HT: 500 (260)	20 (841)
TankJet AA190	**34 (10.4)**	Motor-driven	3.1 to 44 (11.8 to 170)	100 to 1000 (7.0 to 70)	360°, 180°	3.75 (95) for 360°; 4.5 (114.3) for 180°	200 (93)	100 (149)
TankJet YMD3-HP	**30 (9.1)**	Motor-driven	8.6 to 37.5 (33 to 142)	705 to 4360 (50 to 300)	360°	3.75 (95)	176 (80)	100 (149)
TankJet 75		Fluid-driven turbine	8.0 to 33 (30 to 125)	50 to 300 (3.5 to 21)	360°	3.75 (95)	250 (121)	200 (74)
TankJet 27500 & 27500R	**25 (7.6)**	Fluid-driven reactionary force	4.0 to 391 (15.3 to 1490)	10.0 to 50 (0.7 to 3.5)	180° up/down, 270° up/down, 360°	2 to 7 (51 to 178)	200 (93)	100 (149)
TankJet 14 & 16	**24 (7.2)**	Fluid-driven turbine	13.0 to 76 (49 to 288)	50 to 200 (3.4 to 13.8)	360°, 270° down, 180° up/down	TJ14: 2 (51); TJ16: 3 (76)	250 (121)	20 (841)
TankJet 12900	**22 (6.7)**	Fixed stationary	72 to 385 (280 to 1470)	20 to 50 (1.5 to 3.5)	360° and custom spray angles	10 (254)	212 (100)	16 to 100 (1190 to 149)
TankJet D26984 & D40159	**20 (6.0)**	Fluid-driven constant speed	3.2 to 31 (12.0 to 128)	30 to 230 (2.0 to 16.0)	65° down, 120° down, 180° up/down, 260° up/down, 360°	2.25 (56)	160 (70)	200 (74)
TankJet 28500 & 28500R	**18 (5.5)**	Fluid-driven reactionary force	9.0 to 78 (34 to 295)	10.0 to 50 (0.7 to 3.5)	180° up/down, 270° up/down, 360°	2.5 to 4 (64 to 102)	200 (93)	100 (149)
TankJet 9 A, B & C	**12 to 16 (3.7 to 4.9)**	Fluid-driven reactionary force	1.3 to 38 (4.9 to 144)	10.0 to 120 (0.7 to 8.3)	2 x 175°, 360°	TJ9-A: 1.25 (32); TJ9-B: 1.5 (38); TJ9-C: 1.75 (44)	190 (88)	20 (841)

Nozzle	Max. Tank Dia. ft (m)	Operating Principle	Flow Rate gpm (lpm)	Pressure psi (bar)	Spray Coverage	Min. Tank Opening in (mm)	Max. Temp. °F (°C)	Recommended Strainer Mesh (micron)
TankJet 63225	**13 (4.0)**	Fixed stationary	22 to 51 (83 to 192)	15.0 to 40 (1.0 to 2.8)	360°	1.5 to 4 (38 to 102)	400 (204)	16 to 50 (1190 to 297)
TankJet D41800E	**12 (3.6)**	Fluid-driven constant speed	2.7 to 33 (12.0 to 128)	30 to 230 (2.0 to 16.0)	360°	1.25 (32)	300 (150)	200 (74)
TankJet 19		Fluid-driven turbine	10.0 to 30 (38 to 114)	50 to 200 (3.4 to 13.8)	360°, 270° down, 180° up/down	2 (51)	250 (121)	20 (841)
TankJet 6353 & 6353-MFP	**10 (3.0)**	Fixed stationary	8.9 to 80 (35 to 301)	20 to 50 (1.5 to 3.5)	360°	6 (152)	212 (100)	16 to 100 (1190 to 149)
TankJet AA090	**8 (2.4)**	Motor-driven	1.5 to 7.3 (5.7 to 28)	100 to 500 (7.0 to 35)	360°	2.3 (59)	200 (93)	100 (149)
TankJet 18250A		Fluid-driven reactionary force	10.5 to 55 (48 to 205)	10.0 to 60 (1.0 to 4.0)	360°	2.22 (60)	350 (177)	200 (74)
TankJet 30473		Fluid-driven reactionary force	2.1 to 4.5 (7.8 to 18.0)	10.0 to 50 (0.7 to 4.0)	180° up/down, 360°	1 (25)	200 (93)	200 (74)
TankJet D41892	**6.5 (2.0)**	Fluid-driven reactionary force	4.0 to 7.5 (15.9 to 29)	20 to 70 (1.4 to 5.0)	360°	1.5 (37)	160 (70)	200 (74)
TankJet D41990		Fluid-driven reactionary force	2.4 to 26.8 (9.0 to 101)	15.0 to 60 (1.0 to 4.0)	180° up/down, 360°	1 to 3.9 (25 to 98)	300 (149)	200 (74)
TankJet M60	**5 (1.5)**	Motor-driven	1.1 to 10.1 (4.2 to 38)	100 to 1000 (7.0 to 70)	360°	1.75 (44.5)	180 (82)	100 (149)
TankJet D26564		Fluid-driven reactionary force	2.4 to 3.4 (9.0 to 13.0)	14.5 to 73 (1.0 to 5.0)	180° up/down	1.5 (37)	194 (90)	200 (74)
TankJet 21400A		Fluid-driven reactionary force	5.0 to 22 (23 to 82)	10.0 to 60 (1.0 to 4.0)	360°	2.25 (60)	350 (177)	200 (74)
TankJet VSM		Fixed stationary	2.7 to 72 (10.4 to 269)	10.0 to 150 (0.7 to 10.0)	240° down	2 (51)	200 (93)	50 (297)
TankJet 23240-2 23240-3	**3 (0.9)**	Fluid-driven reactionary force	3.5 to 22 (14.0 to 79)	20 to 200 (1.5 to 12.0)	360°, side spray	1.03 (26)	350 (177)	200 (74)

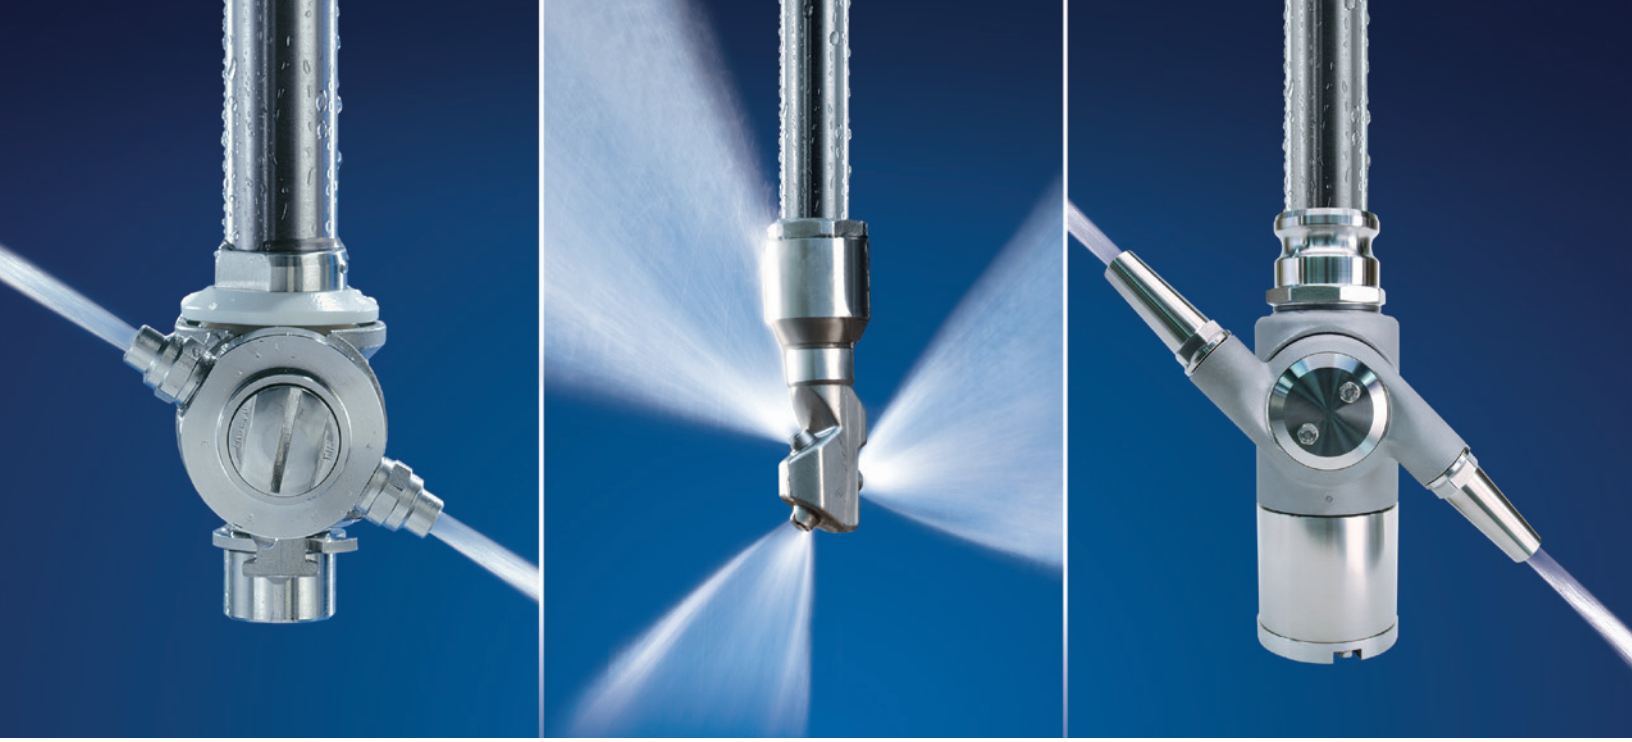

CLEAN YOUR TANKS FASTER, REDUCE WATER AND CHEMICAL USE WITH TANKJET®

TELL US ABOUT:

- The size of your tank
- The residue that needs to be cleaned
- The cleaning liquid used

And we'll tell you which of our many automated tank cleaning products is right for the job. With a newly expanded product line, we have solutions for:

- Gentle rinsing to high-impact cleaning to remove stubborn residues
- Containers and tanks with diameters as small as 3' (1 m) and up to 100' (30 m)
- Portable or clean-in-place operation

One of our locals sales engineers is standing by and ready to help. Call 1.800.95.SPRAY to learn about our complimentary on-site evaluations, free trial programs and more.

1.800.95.SPRAY
visit www.tankjet.com

Spraying Systems Co.®
Experts in Spray Technology

North Avenue and Schmale Road, P.O. Box 7900, Wheaton, IL 60187-7901 USA

Tel: 1.800.95.SPRAY Intl. Tel: 1.630.665.5000
Fax: 1.888.95.SPRAY Intl. Fax: 1.630.260.0842

www.spray.com

ISO 9001:2008 14001:2004 CERTIFIED

Bulletin No. 688E Printed in the U.S.A. ©Spraying Systems Co. 2017